

# BLACK COUNTRY CUSTOMS™

HANDCRAFTED IN THE UK



## THE 85

黑色国度定制系列的贝斯踏板诞生的初衷是为了尽可能的获得最好的贝斯音色.

经过长时间的专业测试和聆听, 每一个黑色国度定制的踏板都是使用最佳品质的部件建造的, 并设计成在您板上使用一生.

## 什么是“T85”

T85 是一个八度音踏板提供工作室音质的音调追踪和声音.

T85给您独立控制一个八度下降和一个额外的可切换的“音程”控制, 允许一个额外的八度上升, 2个八度的下降或者纯五度在您原来的音符上。焦点控制与两个音高控制结合使用. 允许您微调八度和音程范围的特征, 从经典的时髦的超重低音到大规模的合成和弦.


每一个黑色国度定制的踏板真正重要的是被设计成独具特色.

- 显而易见的充分地减轻操作在任何时候
- 超高的输出驱动提供了一个极好的接口在贝斯吉他和效果器踏板/功放之间
- 大大的减少电缆损耗
- 始终如一的贝斯吉他音量性能在所有的设置.
- 信号相位的完整性
- 被动音量踏板的优秀一致的负载
- 超低噪声电路
- 三色LED显示操作模式
- 寂静无声的切换

## 布局

您的踏板的布局是能发挥演奏者最大效能的设计，为演奏者，让您控制所有您需要的功能，快速和有效.

下面的页面将让您深入的了解“T85”上的控件是如何工作和相互作用的.

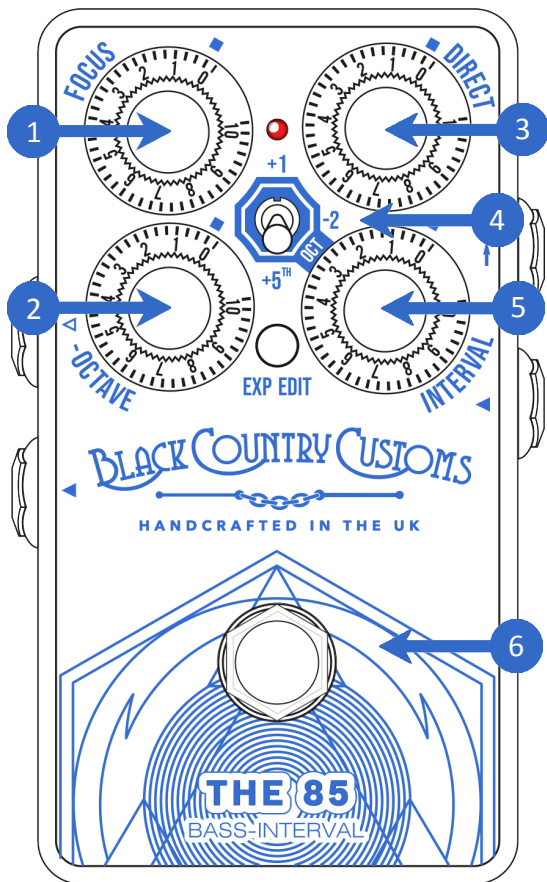

## 1 焦点

改变两个音调档位的焦点，低的设置将移除更高的泛音，这将提供一个更加黑暗的和低沉的音色。更高的设置添加更多的谐波，提供一个更完整的合成器音色。

## 2 八度

控制1个八度的下降水平

## 3 直通

控制直通信号（未处理）的控制量

## 4 音程开关

选择音程音高到半音程


上 - +12 (+1 八度提升)  
中 -24 (-2 八度下降)  
下- +7 (纯五度 提升)

## 5 音程

控制现有音程的水平。音程模式由开关4决定

## 6 脚踏开关

启用/禁用这个踏板

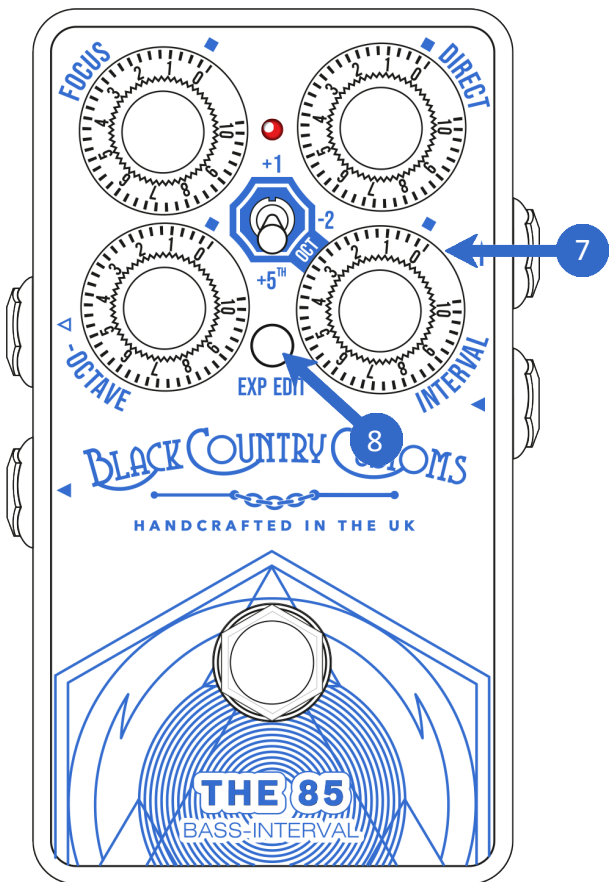

## 7 表达踏板

表达踏板的输入，需要10K TRS风格

一个表达踏板能在两种不同模式下使用

音高模式-控制表达踏板音高至-八度或音程或两者

电平模式- 控制表达踏板电平至-八度或音程或两者

## 8 表达编辑-改变表达踏板的输入模式（见上述）

改变模式，按住表达编辑按钮然后移动音程开关（4）

音程开关上-音高模式

音程开关中-无






音程开关下-电平模式

见下方的图





特征



## PITCH MODE

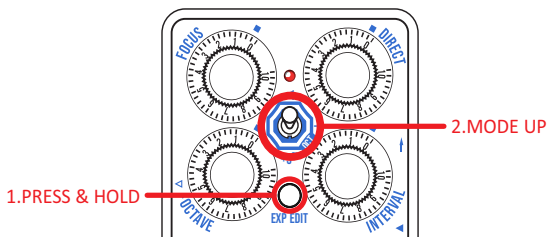

## LEVEL MODE

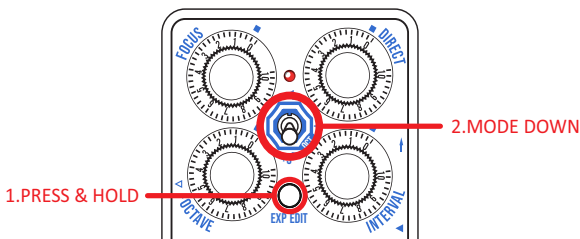






特征



## DUAL CONTROL (-OCTAVE & INTERVAL)




1.PRESS & HOLD



2. TURN FOCUS

## -OCTAVE CONTROL





1.PRESS & HOLD




2. TURN -OCTAVE

## INTERVAL CONTROL

1.PRESS & HOLD



2. TURN INTERVAL

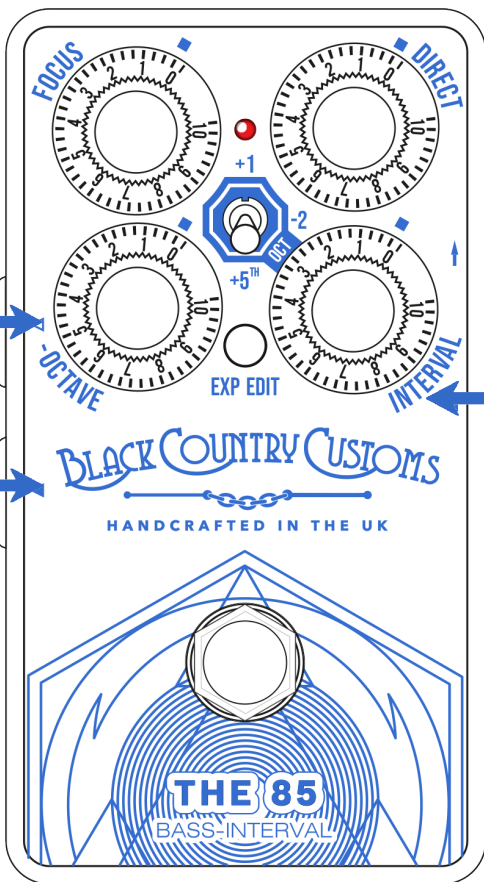

## 9 信号输入

贝斯/吉他/乐器输入

最佳用于贝斯吉他但也能接受其它乐器

## 10 合成效果输出

主要的合成效果输出（这是一个单声道设备）

## 11 直通/干的

直通干的缓冲信号输出没有效果/电平移动.

表达编辑设置存储在板载内存中, 因此一旦设置, 就没有必要再次设置在下次开机时. 如果需要它也可以被恢复出厂设置.

为了恢复出厂设置, 按下并保持表达编辑按钮在踏板上电时, 这将使踏板恢复出厂状态.

型号: T85

效果类型: 贝斯八度

输入阻抗: 1兆欧

输出阻抗: 100欧姆

噪声电平 (20-20KHz 滤波器) :  $<50\mu\text{V}$

频率响应范围: 20-20KHz (+/- 0.5dB)

推荐的最小负载阻抗:  $10\text{K}\Omega$

供电: 规定的9V直流电源适配器 (不包含), 中心负极,  
2.1x10mm连接器类型.

电流损耗: 90mA

单元尺寸 : 58.5 x 74 x 121.55mm,  
2.3" x 2.9" x 4.8"

净重 0.38Kg, 0.8lbs

包装尺寸: 78.5 x 114.5 a 158mm,  
3.1" x 4.5" x 6.2"  
包装尺寸:

毛重: 0.6Kg, 1.3lbs



This device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference
- 2) This device must accept any interference received, that may cause undesired operation.

**Warning:** Changes or modification to the equipment not approved by Laney can void the user's authority to use the equipment.

**Note:** This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures.

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.



This product conforms to the requirements of the following European Regulations, Directives & Rules:

CE Mark (93/68/EEC), Low Voltage 2014/35/EU, EMC (2014/30/EU), RoHS (2011/65/EU), RED (2014/30/EU), ErP 2009/125/EU



In order to reduce environmental damage, at the end of its useful life, this product must not be disposed of along with normal household waste to landfill sites. It must be taken to an approved recycling centre according to the recommendations of the WEEE (Waste Electrical and Electronic Equipment) directive applicable in your country.

#### SIMPLIFIED EU DECLARATION OF CONFORMITY

Hereby, Laney Electronics Ltd. declares that the radio equipment is in compliance with Directives 2014/53/EU, 2011/65/EU, 2009/125/EU

Full text of the EU declaration of conformity is available at the following internet address:

[support.laney.co.uk/approvals](http://support.laney.co.uk/approvals)





BLACK COUNTRY CUSTOMS<sup>TM</sup>

HANDCRAFTED IN THE UK