

BLACK COUNTRY CUSTOMS™

HANDCRAFTED IN THE UK



THE CUSTARD FACTORY

黑色国度定制系列的贝斯踏板诞生的初衷是为了尽可能的获得最好的贝斯音色.

经过长时间的专业测试和聆听, 每一个黑色国度定制的踏板都是使用最佳品质的部件建造的, 并设计成在您板上使用一生.

什么是“蛋糕工厂”

“蛋糕工厂”是一个工作室品质, 一个容易使用的格式的压缩机踏板

“蛋糕工厂”的设计是显而易见的, 简单易用, 并提供一致的音乐声音, 而不损害您乐器的任何基本的音质.

“蛋糕工厂”完美的为您提供精准地压缩您寻找到的任何贝斯音色.


每一个黑色国度定制的踏板真正重要的是被设计成独具特色.

- 显而易见的充分地减轻操作在任何时候
- 超高的输出驱动提供了一个极好的接口在贝斯吉他和效果器踏板/功放之间
- 大大的减少电缆损耗
- 始终如一的贝斯吉他音量性能在所有的设置.
- 信号相位的完整性
- 被动音量踏板的优秀一致的负载
- 超低噪声电路
- 寂静无声的切换
- 低的电池电量损

布局

您的踏板的布局是能发挥演奏者最大效能的设计，为演奏者，让您控制所有您需要的功能，快速和有效.

下面的页面将让您深入的了解“蛋糕工厂”上的控件是如何工作和相互作用的.

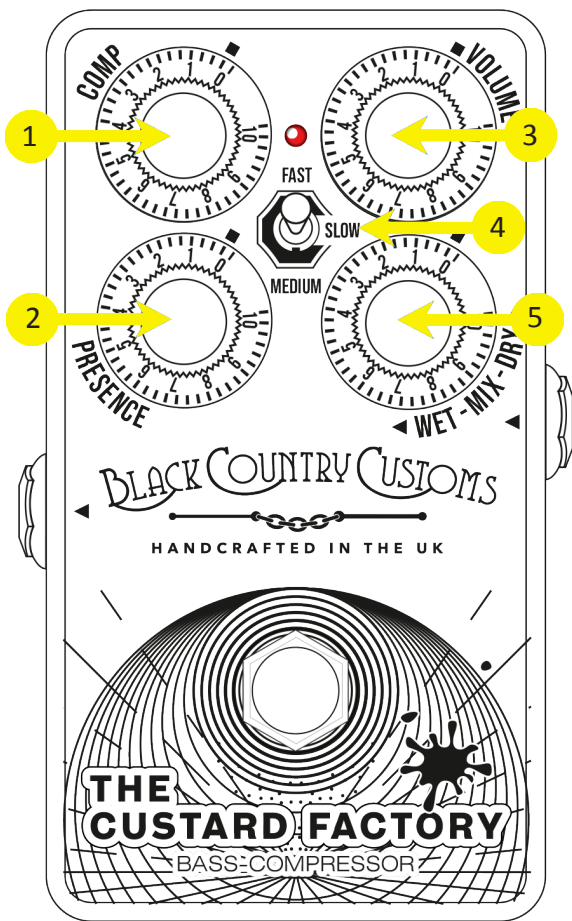

1 压缩

控制压缩的量

2 临场度

控制被压缩信号中的高音的量

3 音量


控制压缩机脚踏的输出信号电平

4 模式开关

改变压缩电路的攻击速度，快用于快的音符，慢用于长音符，中等音符位于两者之间。

5 湿的-混合的-干的

控制允许干的信号和压缩信号混合，表盘逆时针为完全的干，顺时针为完全的湿，50/50在中心。根据您的口味设置。

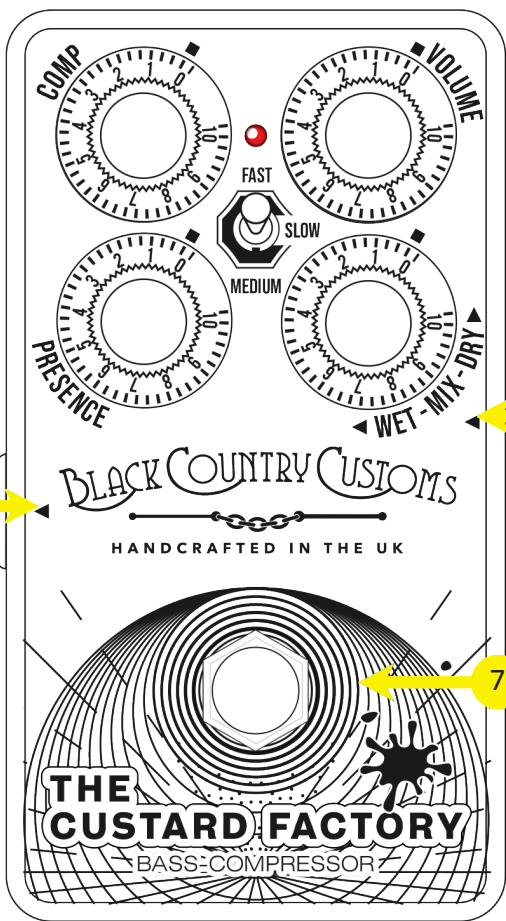

6 信号输入

贝斯/吉他/乐器输入，最佳用于贝斯吉他但也能接受其它乐器.

7 脚踏开关

启用/禁用这个踏板

8 输出

主要的合成效果输出（这是一个单声道设备）

将质量良好的9V电池安装进踏板，拧下踏板的底座螺丝并将电池牢固的安装到电池连接器上，然后再将底座安装回踏板，不要使用过大的力来紧固4个底座螺丝，这样容易损坏螺丝。

当您不用时最好将输入插座从您的踏板上移除，防止不必要的电池电力浪费。

注意-当您打算长时间不用踏板的时候，始终建议将电池取出，以防止电流的损耗和电池泄露。

另外-强烈建议使用高质量的外部9V直流电源适配器。

型号: The CUSTARD FACTORY “蛋糕工厂”

效果类型: 贝斯压缩

输入阻抗: 1兆欧

输出阻抗: 100欧姆

噪声电平 (20-20KHz 滤波器) : $<50\mu V$

频率响应范围: 20-20KHz (+/- 0.5dB)

推荐的最小负载阻抗: $10K\Omega$

供电: 规定的9V直流电源适配器 (不包含), 中心负极, 2.1x10mm连接器类型. 内部9V PP3电池包含 (推荐碱性电池)

电流损耗: $<10mA$

电池寿命: 30小时-这是根据您的使用和选用的电池

单元尺寸: 58.5 x 74 x 121.55mm, 2.3” x 2.9”
x 4.8”

净重 : 0.38Kg, 0.8lbs

包装尺寸: : 78.5 x 114.5 a 158mm,
3.1” x 4.5” x 6.2”

毛重: 0.6Kg, 1.3lbs



This device complies with Part 15 of the FCC rules.
Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference
- 2) This device must accept any interference received, that may cause undesired operation.

Warning: Changes or modification to the equipment not approved by Laney can void the user's authority to use the equipment.

Note: This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures.

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.



This product conforms to the requirements of the following European Regulations, Directives & Rules:

CE Mark (93/68/EEC), Low Voltage 2014/35/EU, EMC (2014/30/EU), RoHS (2011/65/EU), RED (2014/30/EU), ErP 2009/125/EU



In order to reduce environmental damage, at the end of its useful life, this product must not be disposed of along with normal household waste to landfill sites. It must be taken to an approved recycling centre according to the recommendations of the WEEE (Waste Electrical and Electronic Equipment) directive applicable in your country.

SIMPLIFIED EU DECLARATION OF CONFORMITY

Hereby, Laney Electronics Ltd. declares that the radio equipment is in compliance with Directives 2014/53/EU, 2011/65/EU, 2009/125/EU

Full text of the EU declaration of conformity is available at the following internet address:

support.laney.co.uk/approvals



BLACK COUNTRY CUSTOMSTM

HANDCRAFTED IN THE UK