

# BLACK COUNTRY CUSTOMS™

HANDCRAFTED IN THE UK



## THE CUSTARD FACTORY

Black Country Customs(BCC) 베이스 페달 시리즈는 최상의 베이스 톤을 만들고자 하는 마음에서 시작되었습니다.

많은 시간의 테스트를 거친 결과로, 각 블랙 컨트리 커스텀 페달은 최고 품질의 구성품들을 사용하여 제작되었으며 연주자들이 페달보드에 설치하여 평생 동안 사용할 수 있도록 설계되었습니다.

커스타드 팩토리(CUSTARD FACTORY)란?

커스타드 팩토리는 사용하기 간단한 스튜디오 품질의 컴프레서 페달입니다.

커스터드 팩토리(Custard Factory)는 기기의 기본 음질을 손상시키지 않으면서 투명하고 사용이 간편하며 일관된 음악 사운드를 제공하도록 설계되었습니다.

커스터드 팩토리(Custard Factory)는 어떠한 베이스톤에도 원하는 컴프레서 사운드를 내어줍니다.


각 BCC 페달은 이펙터에 정말 필요한 기능들로만 통합하도록 설계되었습니다.

- 높은 양의 아웃풋으로 베이스기타와 이펙터/프리앰프의 좋은 파운데이션을 만들어 줍니다.
  - 케이블을 통한 신호 감소 최소화
  - 모든 세팅에서 안정적인 레벨을 유지시켜줌
  - 신호 단계 무결성
  - 패시브에 대한 우수한 일관된 하중
- 볼륨 페달입니다.
- 초저소음 회로
  - 저음 전환
  - 낮은 배터리 소모량

## 레이아웃

페달의 레이아웃은 플레이어가 필요한 모든 기능을 빠르고 효과적으로 제어할 수 있도록 인체공학적으로 설계되었습니다.

다음 페이지에서는 THE CUSTARD FACTORY의 컨트롤이 어떻게 작동하고 서로 상호 작용하는지에 대해 설명합니다.

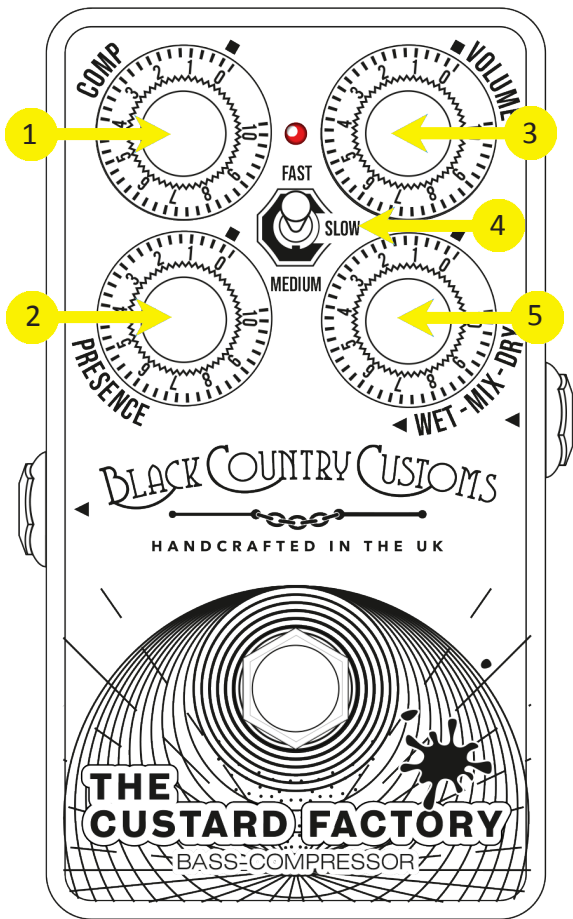


1 COMP(컴프레서)  
컴프레서의 양을 조절합니다.

2 PRESENCE(프리젠스)  
컴프레스된 신호의 트레블 양을 조절합니다

3 VOLUME(볼륨)  
페달의 아웃풋 레벨을 설정해줍니다.

4 MODE SWITCH(모드 스위치)  
어택의 속도를 조절합니다. FAST는 짧게 끊기  
고 SLOW는 서스테인이 길어집니다.

5 WET-MIX-DRY  
컴프레스된 신호에 다이렉트 신호를 섞기 위해  
조절합니다. 반시계 방향으로 조절 시 다이렉트  
신호에 가까운, 시계 방향으로 갈수록 컴프레  
스된 신호에 가까운 소리를 냅니다.

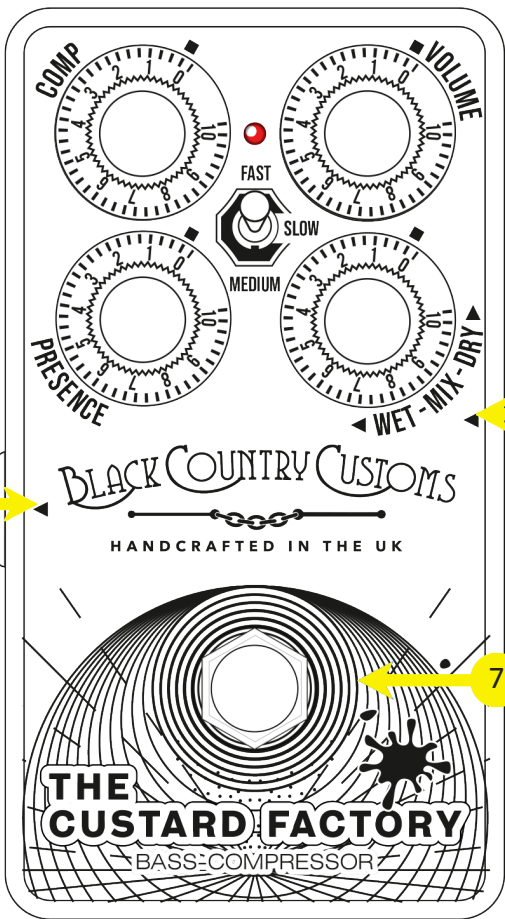

**6** SIGNAL INPUT(인풋)

베이스기타 / 일렉기타 / 악기 인풋. 베이스에  
특화된 페달이지만 다른 악기에도 사용 가능  
합니다.

**7** FOOTSWITCH(풋스위치)

페달을 활성화/비활성화합니다.

**8** OUTPUT(아웃풋)

주 FX 아웃풋 (이 기기는 모노 기기입니다)

페달 베이스의 나사를 풀고 양호한 품질의 9V 배터리를 배터리 커넥터에 끼운 다음 베이스판을 다시 설치해줍니다. 나사 4개를 과도하게 힘을 주어 조이지 마십시오. 나사가 손상될 수 있습니다.

사용하지 않을 때는 항상 페달에서 인풋 잭을 제거하여 불필요한 배터리 전원 손실을 방지하는 것이 좋습니다.

주의 - 장시간 페달을 사용하지 않으려는 경우에는 항상 배터리를 제거하여 전류 손실 및 배터리 누설을 방지하는 것이 좋습니다.

상태가 양호한 DC 9V PSU를 사용하는 것도 좋습니다



Model: The CUSTARD FACTORY

FX Type: BASS COMPRESSION

Input Impedance:  $1\text{M}\Omega$

Output Impedance:  $100\Omega$

Noise Level (20-20KHz Filter) :  $<50\mu\text{V}$

Frequency Response Bypassed : 20-20KHz (+/- 0.5dB)

Recommended Minimum Load Impedance :  $10\text{K}\Omega$

Power Supply : Regulated 9V DC PSU (Not Included),  
centre negative, 2.1x10mm connector type. Internal  
9V PP3 battery included (alkaline recommended)

Current Consumption :  $<10\text{mA}$

Battery Life : 30 hours – this will vary on use and  
selected battery

Unit Dimensions : 58.5 x 74 x 121.55mm,  
2.3" x 2.9" x 4.8"

Net Weight : 0.38Kg, 0.8lbs

Carton dimensions : 78.5 x 114.5 a 158mm,  
3.1" x 4.5" x 6.2"

Gross Weight : 0.6Kg, 1.3lbs



This device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference
- 2) This device must accept any interference received, that may cause undesired operation.

**Warning:** Changes or modification to the equipment not approved by Laney can void the user's authority to use the equipment.

**Note:** This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures.

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.



This product conforms to the requirements of the following European Regulations, Directives & Rules:

CE Mark (93/68/EEC), Low Voltage 2014/35/EU, EMC (2014/30/EU), RoHS (2011/65/EU), RED (2014/30/EU), ErP 2009/125/EU



In order to reduce environmental damage, at the end of its useful life, this product must not be disposed of along with normal household waste to landfill sites. It must be taken to an approved recycling centre according to the recommendations of the WEEE (Waste Electrical and Electronic Equipment) directive applicable in your country.

#### SIMPLIFIED EU DECLARATION OF CONFORMITY

Hereby, Laney Electronics Ltd. declares that the radio equipment is in compliance with Directives 2014/53/EU, 2011/65/EU, 2009/125/EU

Full text of the EU declaration of conformity is available at the following internet address:

[support.laney.co.uk/approvals](http://support.laney.co.uk/approvals)



BLACK COUNTRY CUSTOMS<sup>TM</sup>

HANDCRAFTED IN THE UK